


TRIA C6B-ALP

Intel® Core™ 12th Generation

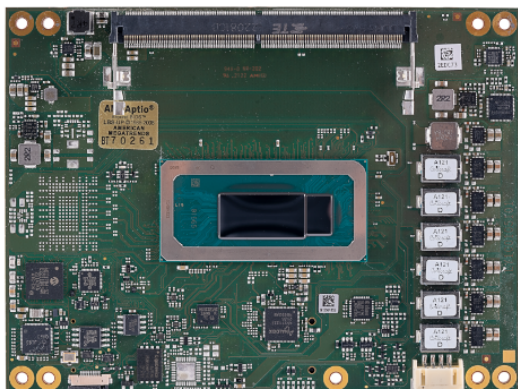

125 x 95

⚡ tbd

0-+60°C

COM 
Express



Highlights

- 12th Gen Intel® Core™ processors
- Scalable CPU performance
- Up to fourteen cores, twenty threads
- Up to 64GB DDR5-4800 SDRAM, dual channel
- Intel® Iris® Xe architecture Graphics, up to 96 EUs
- Three DisplayPort/HDMI interfaces
- LVDS and Embedded DisplayPort interface
- Up to four independent displays
- PCI Express® 4×1 lanes, configurable up to x4, Gen 3, PCI Express® 1×4, Gen 4
- PEG 1×8, PCIe Gen 4 (optional)
- Four USB 3.2 Gen1/2 and eight USB 2.0 ports
- Two UARTs
- Optional on-board NVMe SSD, up to 256GB
- Two SATA 6Gb/s mass storage interfaces
- 1 / 2.5 Gb Ethernet port (Intel® i226)
- Trusted Platform Module TPM 2.0

COM Express Type 6



- Long-term product availability

COM Express Type 6



Technical Data

Technology	x86
Formfactor	COM Express Basic
CPU	12th Gen Intel® Core™ processors H-series Intel® Core™ i7-12800HE 6P+8E/20T, 2.4GHz, 96 EUs, 24MB L3, 45/35W cTDP Intel® Core™ i5-12600HE 4P+8E/16T, 2.5GHz, 80 EUs, 18MB L3, 45/35W cTDP Intel® Core™ i3-12300HE 4P+4E/12T, 1.9GHz, 48 EUs, 12MB L3, 45/35W cTDP P-series Intel® Core™ i7-1270PE 4P+8E/16T, 1.8GHz, 96 EUs, 24MB L3, 28/20W cTDP Intel® Core™ i5-1250PE 4P+8E/16T, 1.7GHz, 80 EUs, 12MB L3, 28/20W cTDP Intel® Core™ i3-1220PE 4P+4E/12T, 1.5GHz, 48 EUs, 12MB L3, 28/20W cTDP U-series Intel® Core™ i7-1265UE 2P+8E/12T, 1.7GHz, 96 EUs, 12MB L3, 15/12W cTDP Intel® Core™ i5-1245UE 2P+8E/12T, 1.5GHz, 80 EUs, 12MB L3, 15/12W cTDP Intel® Core™ i3-1215UE 2P+4E/8T, 1.2GHz, 64 EUs, 10MB L3, 15/12W cTDP Intel® Celeron® 7305E 1P+4E/5T, 1.0GHz, 48 EUs, 8MB L3, 15/12W cTDP Note: P core base frequency at nominal TDP shown, other clock frequencies supported
Chipset	Integrated into SoC
RAM	2x 262-pin SO-DIMM socket for up to 2x 32GB DDR5 SDRAM (DDR5-4800); dual channel operation; minimum capacity 1x 8GB single channel operation
Storage Interfaces	2x SATA channels (up to 6Gb/s) Optional on-board NVMe, 128GB, 256GB
USB	4x USB 3.2 (Gen 1 & 2), 8x USB 2.0
Serial Interfaces	2x high-speed serial ports
Bus Interfaces	PCI Express® Graphics (PEG) Gen 4, 1x8, on COMe PEG[0:7]¹ PCI Express® Gen 4, 1x4, on COMe PCIe[4:7] PCI Express® Gen 3, 1x4, flexible bifurcation options, on COMe PCIe[0:3] LPC bus (Low Pin Count bus, no DMA support) ¹ Available on H-series processors
Display Controller	Intel® Iris® Xe architecture Graphics, Up to 96 execution units (EU) H.264/AVC, H.265/HEVC, AV1, MJPEG encode/decode/transcode.
Display Interfaces	Four independent displays supported 3x Digital Display Interface (DP 1.4a, HDMI 2.0b) 1x Embedded DisplayPort 1.4b 1x LVDS 24bit, dual-channel;
Network Interface	10/100/1000Base-TX, 2.5G² based on Intel i226-LM ² Available bandwidths depending on carrier design
Audio Interface	High Definition Audio
Security Device	TPM 2.0
Miscellaneous	Watchdog Timer: Initiates system reset, programmable Fan Supply: 4-pin header for CPU fan, PWM speed controlled and PWM speed control for system fan supported RTC battery: external System Monitoring: voltage, temperature, CPU fan, system fan
Feature Highlights	Type 6 pin-out

COM Express Type 6



Firmware	UEFI Firmware: AMI Aptio® V Security: TPM 2.0 support, TCG compliant Power Management: ACPI Active fan control USB: USB legacy support (keyboard, mouse, storage) Monitoring: System Monitoring Health Monitoring Tria Adv. Boot Device Selection: Boot device priority setting based on physical interfaces
OS Support	Windows 11 IoT Enterprise LTSC 2024 BSP for Linux (Yocto)
Power Requirement	Voltage: +8.5V to +20V, +5V Stby optional Power Consumption: tbd W to tbd W (typ.)
Environment	Ambient Temperature: 0° ... 60°C (operating) -25° ... 85°C (storage) Humidity: 5 ... 95% (operating, non-condensing), 5 ... 95% (storage, non-condensing)
Dimensions	125 x 95
Certificates	UL / CE

Technical Data for TRIA C6B-ALP

Order Reference

Order No.	Description	Reference	Status *
98864	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i7-12800HE 14C/20T, 2.4GHz, 45/35W cTDP; Graphics: Intel® Iris® Xe 96 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PEG x8 Gen 4, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-12800HE-NN0301C PCBFTX	OR
98858	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i5-12600HE 12C/16T, 2.5GHz, 45/35W cTDP; Graphics: Intel® Iris® Xe 80 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PEG x8 Gen 4, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-12600HE-NN0301C PCBFTX	PV
98852	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i3-12300HE 8C/12T, 1.9GHz, 45/35W cTDP; Graphics: Intel® UHD Graphics 48 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PEG x8 Gen 4, PCIe Gen 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-12300HE-NN0301C PCBFTX	PV
98862	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i7-1270PE 12C/16T, 1.8GHz, 28/20W cTDP; Graphics: Intel® Iris® Xe 96 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-1270PE-NN0301C PCBFTX	OR
98856	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i5-1250PE 12C/16T, 1.7GHz, 28/20W cTDP; Graphics: Intel® Iris® Xe 80 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-1250PE-NN0301C PCBFTX	PV
98840	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i3-1220PE 8C/12T, 1.5GHz, 28/20W cTDP; Graphics: Intel® UHD Graphics 48 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-1220PE-NN0301C PCBFTX	PV

COM Express Type 6

Order No.	Description	Reference	Status *
98860	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i7-1265UE 10C/12T, 1.7GHz, 15/12W cTDP; Graphics: Intel® Iris® Xe 96 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-1265UE-NN0301C PCBFTX	PV
98854	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i5-1245UE 10C/12T, 1.5GHz, 15/12W cTDP; Graphics: Intel® Iris® Xe 80 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-1245UE-NN0301C PCBFTX	PV
110528	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel i3-1215UE 6C/8T, 1.2GHz, 15/12W cTDP; Graphics: Intel® UHD Graphics 64 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-1215UE-NN0301C PCBFTX	PV
98866	COM Express Type 6 Basic module (125mm x 95mm); CPU: Intel Celeron 7305E 5C/5T, 1.0GHz, 15/12W cTDP; Graphics: Intel® UHD Graphics 48 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 1x4, PCIe Gen 3 4x1; 2x socket for DDR5; 0...+60°C.	MSC C6B-ALP-7305E-NN0301C PCBFTX	PV

Ordering Information for TRIA C6B-ALP

*PV = Preferred variant; OR = on Request (in OEM quantities only)

Accessories

Cooling Solutions

Order No.	Description	Reference
92019	Passive Heatsink for C6B-ALP and C6B-RLP consisting of a singlepiece aluminum profile with fins, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC C6B-ALP-01 HSI-001
92020	Passive Heatsink / heat pipe for C6B-ALP and C6B-RLP consisting of a single-piece aluminum profile with fins and embedded heatpipe, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC C6B-ALP-01 HSI-HP-001
92021	Heatspreader for C6B-ALP and C6B-RLP. Single-piece aluminum profile, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC C6B-ALP-01 HSP-001
92032	Heatspreader / heat pipe for C6B-ALP and C6B-RLP. Singlepiece aluminum profile with embedded heat pipe, standoffs without thread (2.7mm inner diameter), screws and thermopad for the thermal contact to CPU, chipset, NVMe.	MSC C6B-ALP-01 HSP-HP-001
92033	Heatspreader for C6B-ALP and C6B-RLP. Single-piece aluminum profile, standoffs with M2.5 thread, screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC C6B-ALP-02 HSP-001

Cooling Devices for TRIA C6B-RLP/ALP

Order No.	Description	Reference
79809	Fan kit for Heatsink MSC HCA-ALP/RLP/MLH/PLH-0x HSI-xxx, MSC C6B-TLH/ALP/RLP/MLH-0x HSI-xxx, MSC C6C-WLU/TLU/ALP/RLP/PLH-0x HSI-xxx, MSC C6C-EL/ALN/ASL-0x HSI-xxx, MSC C6C-RYZx-0x HSI-xxx, PWM fan 80x80x15mm.	MSC C6C-FANKIT-01-HSF-001

Fan Kit for COM Express Heatsinks

Memory Options

Order No.	Description	Reference
115233	8GB DDR5-5600 SO-DIMM, commercial temperature	MOD SODIMM DDR5 8GB PC5-44800 CL22 1B
115234	16GB DDR5-5600 SO-DIMM, commercial temperature	MOD SODIMM DDR5 16GB PC5-44800 CL22 1B
115235	32GB DDR5-5600 SO-DIMM, commercial temperature	MOD SODIMM DDR5 32GB PC5-44800 CL22 2B

Memory Options for TRIA C6B-ALP (max. DDR5-4800 supported by processor)

COM Express Type 6



Tria Technologies GmbH
Industriestr. 16
76297 Stutensee
info@tria-technologies.com
tria-technologies.com

Copyright © 2024 Tria Technologies GmbH. All data is for information purposes only and is subject to change without notice. No guarantee for legal purposes is implied. Information in this document has been carefully checked, however, no responsibility for inaccuracies has to be assumed. All brand or product names may be trademarks and property of their respective owners.