


TRIA C6C-ALP

Intel® Core™ 12th Generation

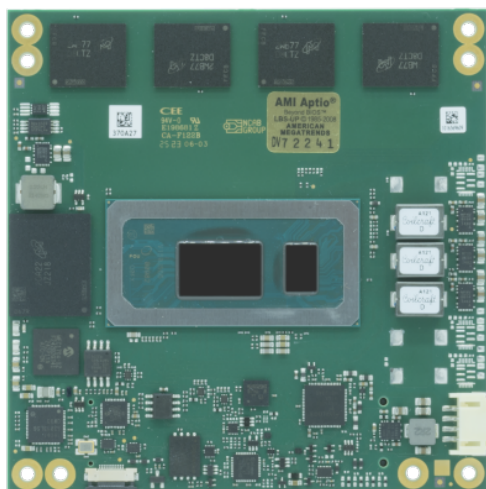

95 x 95

22 / 49 W

0 - +60°C

COM 
Express



Highlights

- 12th Gen Intel® Core™ processors
- Scalable CPU performance
- Up to fourteen cores, twenty threads
- Up to 32GB LPDDR5-5200 main memory, memory-down
- Intel® Iris® Xe architecture Graphics, up to 96 EUs
- Three DisplayPort/HDMI interfaces
- LVDS and Embedded DisplayPort interface
- Up to four independent displays
- Up to eight PCI Express® Gen 3 lanes, flexible bifurcation options
- PCI Express® Gen 4, up to 2x4
- Optional PEG port, PCI Express® Gen 4, 1x8
- Up to two USB4, four USB 3.2 Gen1/2 and eight USB 2.0 ports
- Two UARTs
- Optional on-board NVMe SSD, up to 256GB
- Up to two SATA 6Gb/s mass storage interfaces
- 1 / 2.5 Gb Ethernet port (Intel® i225/226)
- Trusted Platform Module TPM 2.0
- Long-term product availability

COM Express Type 6



Technical Data

Technology	x86
Formfactor	COM Express Compact
CPU	12th Gen Intel® Core™ processors H-series Intel® Core™ i7-12800HE 6P+8E/20T, 2.4GHz, 96 EUs, 24MB L3, 45/35W cTDP Intel® Core™ i5-12600HE 4P+8E/16T, 2.5GHz, 80 EUs, 18MB L3, 45/35W cTDP Intel® Core™ i3-12300HE 4P+4E/12T, 1.9GHz, 48 EUs, 12MB L3, 45/35W cTDP P-series Intel® Core™ i7-1270PE 4P+8E/16T, 1.8GHz, 96 EUs, 24MB L3, 28/20W cTDP Intel® Core™ i5-1250PE 4P+8E/16T, 1.7GHz, 80 EUs, 12MB L3, 28/20W cTDP Intel® Core™ i3-1220PE 4P+4E/12T, 1.5GHz, 48 EUs, 12MB L3, 28/20W cTDP U-series Intel® Core™ i7-1265UE 2P+8E/12T, 1.7GHz, 96 EUs, 12MB L3, 15/12W cTDP Intel® Core™ i5-1245UE 2P+8E/12T, 1.5GHz, 80 EUs, 12MB L3, 15/12W cTDP Intel® Core™ i3-1215UE 2P+4E/8T, 1.2GHz, 64 EUs, 10MB L3, 15/12W cTDP Intel® Celeron® 7305E 1P+4E/5T, 1.0GHz, 48 EUs, 8MB L3, 15/12W cTDP Note: P core base frequency at nominal TDP shown, other clock frequencies supported
Chipset	Integrated into SoC
RAM	Up to 32GB LPDDR5-5200 memory; memory-down; minimum capacity 4GB
Storage Interfaces	Up to 2x SATA channels (up to 6Gb/s) Optional on-board NVMe, 128GB, 256GB
USB	Up to 2x USB4 Gen 2, shared with DDI1/2 4x USB 3.2 (Gen 1 & 2) 8x USB 2.0 Note: capabilities depending on carrier design
Serial Interfaces	2x high-speed serial ports
Bus Interfaces	PCI Express® Gen 4, 1x4, on COMe PCIe[16:19] PCI Express® Gen 4, 1x4, on COMe PCIe[20:23], optional PCI Express® Gen 4, 1x8, on COMe PCIe[24:31], PEG port, optional ¹ Up to eight PCI Express® Gen 3 lanes, flexible bifurcation options, up to 5 root ports LPC bus (Low Pin Count bus, no DMA support) ¹ Available on H-series processors
Display Controller	Intel® Iris® Xe architecture Graphics, Up to 96 execution units (EU) H.264/AVC, H.265/HEVC, AV1, MJPEG encode/decode/transcode
Display Interfaces	Four independent displays supported 3x Digital Display Interface (DP 1.4a, HDMI 2.0b) 1x Embedded DisplayPort 1.4b 1x LVDS 24bit, dual-channel;
Network Interface	10/100/1000Base-TX, 2.5G ² based on Intel i226-LM ² Available bandwidths depending on carrier design
Audio Interface	High Definition Audio
Security Device	TPM 2.0
Miscellaneous	Watchdog Timer: Initiates system reset, programmable Fan Supply: 4-pin header for CPU fan, PWM speed controlled and PWM speed control for system fan supported RTC battery: external System Monitoring: voltage, temperature, CPU fan, system fan

COM Express Type 6



Feature Highlights	Type 6 pin-out
Firmware	UEFI Firmware: AMI Aptio® V Security: TPM 2.0 support, TCG compliant Power Management: ACPI Active fan control USB: USB legacy support (keyboard, mouse, storage) Monitoring: System Monitoring Health Monitoring Tria Adv. Boot Device Selection: Boot device priority setting based on physical interfaces
OS Support	Windows 11 IoT Enterprise LTSC 2024 BSP for Linux (Yocto)
Power Requirement	Voltage: +8.5V to +20V, +5V Stby optional Power Consumption: 22 W to 49 W (typ., variant dependent)
Environment	Ambient Temperature: 0° ... 60°C (operating) -25° ... 85°C (storage) Humidity: 5 ... 95% (operating, non-condensing), 5 ... 95% (storage, non-condensing)
Dimensions	95 x 95

Technical Data for TRIA C6C-ALP

Order Reference

Order No.	Description	Reference	Status*
97985	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel i7-1270PE 14C/20T, 1.8GHz, 28/20W cTDP; Graphics: Intel® Iris® Xe 96 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 8x; 16GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-1270PE-4N301C PCBFTX	OR
97981	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel i5-1250PE 12C/16T, 1.7GHz, 28/20W cTDP; Graphics: Intel® Iris® Xe 80 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 8x; 8GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-1250PE-3N301C PCBFTX	OR
97975	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel i3-1220PE 8C/12T, 1.5GHz, 28/20W cTDP; Graphics: Intel® UHD 48 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 8x; 8GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-1220PE-3N301C PCBFTX	OR
97983	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel i7-1265UE 10C/12T, 1.7GHz, 15/12W cTDP; Graphics: Intel® Iris® Xe 96 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 8x; 8GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-1265UE-3N301C PCBFTX	OR
97977	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel i5-1245UE 10C/12T, 1.5GHz, 15/12W cTDP; Graphics: Intel® Iris® Xe 80 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 8x; 8GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-1245UE-3N301C PCBFTX	OR
97973	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel i3-1215UE 6C/8T, 1.2GHz, 15/12W cTDP; Graphics: Intel® UHD 64 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 8x; 8GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-1215UE-3N301C PCBFTX	OR
97989	COM Express Type 6 Compact module (95mm x 95mm); CPU: Intel Celeron 7305E 5C/5T, 1.0GHz, 15/12W cTDP; Graphics: Intel® UHD 48 EUs; 3x DP/HDMI; 1x LVDS; 1x eDP; Ethernet: Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x SATA, 4x USB3, 8x USB2, PCIe Gen 4 2x4, PCIe Gen 3 6x; 8GB LPDDR5-5200 memory; 0...+60°C.	MSC C6C- ALP-7305E-3N331C PCBFTX	OR

Ordering Information for TRIA C6C ALP

*PV = Preferred variant; OR = on Request (in OEM quantities only)

Accessories

Carrier Boards

Order No.	Description	Reference
111650	COM Express Type 6 Evaluation Carrier Board with various PCI Express x1, x4 and x16 slots, USB 3.0/2.0, GbE, M.2, SD card socket, SATA, DisplayPort, LVDS, eDP, VGA, HD audio interfaces; ATX power connector. Dimensions: 305 x 244 mm (ATX form factor)	MSC C6-MB-EV4 PCBFTX

Carrier Boards for TRIA C6B-xxx/C6C-xxx Products

Cooling Solutions

Order No.	Description	Reference
96413	Passive Heatsink for C6C-ALP and C6C-RLP consisting of a single-piece aluminum profile with fins, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to major devices.	MSC C6C-ALP-01 HSI-001
96414	Passive Heatsink / heat pipe for C6C-ALP and C6C-RLP consisting of a single-piece aluminum profile with fins and embedded heatpipe, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to major devices.	MSC C6C-ALP-01 HSI-HP-001
96415	Heatspreader for C6C-ALP and C6C-RLP. Single-piece aluminum profile, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to major devices.	MSC C6C-ALP-01 HSP-001
96416	Heatspreader / heat pipe for C6C-ALP and C6C-RLP. Single-piece aluminum profile with embedded heat pipe, standoffs without thread (2.7mm inner diameter), screws and thermopad for the thermal contact to major devices.	MSC C6C-ALP-01 HSP-HP-001
96417	Heatspreader for C6C-ALP and C6C-RLP. Single-piece aluminum profile, standoffs with M2.5 thread, screws and thermopads for the thermal contact to major devices.	MSC C6C-ALP-02 HSP-001

Cooling Devices for TRIA C6C-ALP/RLP

Order No.	Description	Reference
79809	Fan kit for Heatsink MSC HCA-ALP/RLP/MLH/PLH-0x HSI-xxx, MSC C6B-TLH/ALP/RLP/MLH-0x HSI-xxx, MSC C6C-WLU/TLU/ALP/RLP/PLH-0x HSI-xxx, MSC C6C-EL/ALN/ASL-0x HSI-xxx, MSC C6C-RYZx-0x HSI-xxx, PWM fan 80x80x15mm.	MSC C6C-FANKIT-01-HSF-001

Fan Kit for COM Express Heatsinks

COM Express Type 6



Tria Technologies GmbH
Industriestr. 16
76297 Stutensee
info@tria-technologies.com
tria-technologies.com

Copyright © 2024 Tria Technologies GmbH. All data is for information purposes only and is subject to change without notice. No guarantee for legal purposes is implied. Information in this document has been carefully checked, however, no responsibility for inaccuracies has to be assumed. All brand or product names may be trademarks and property of their respective owners.