


TRIA HCA-MLH

Intel® Core™ Ultra Processors

120 x 95

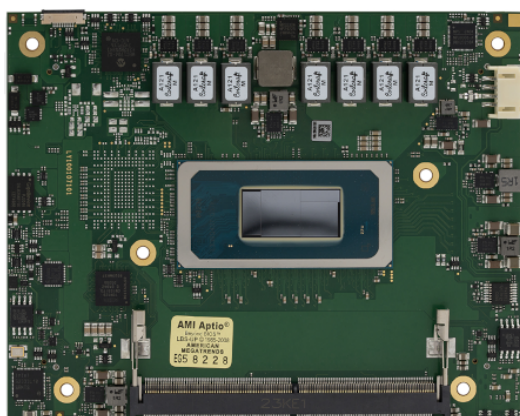

⚡ tbd

🌡️ 0 +60

COM+HPC®



Highlights

- COM-HPC Client, Size A module
- Intel® Core™ Ultra Processors Series 1 and 2
- Up to sixteen cores, twenty-two threads
- Integrated AI accelerator (NPU) Intel® AI Boost
- Up to 96GB DDR5-6400 SDRAM, dual channel, IB-ECC
- Intel® Arc™ Graphics, up to 8 Xe cores (128 EUs)
- Three DisplayPort/HDMI interfaces
- Embedded DisplayPort interface
- Four independent display streams
- Up to sixteen PCI Express® Gen 4 lanes
- PEG 1×8, PCIe Gen 4/5 (optional)
- Two USB4, two USB 3.2 Gen1/2 and eight USB 2.0 ports
- Two UARTs
- Optional on-board NVMe SSD, up to 256GB
- Up to two SATA 6Gb/s mass storage interfaces
- Two 1 / 2.5 Gb Ethernet ports (Intel® i226)
- Trusted Platform Module TPM 2.0
- Long-term product availability for selected variants

Technical Data

Technology	x86
Formfactor	COM-HPC Size A
CPU	Intel® Core™ Ultra Processors Series 2: Intel® Core™ Ultra 9 processor 285H 6P+8E+2LPE/22T, 2.9GHZ, 8Xe/128EUs, 24MB L3, vPRO®, 45W BP Intel® Core™ Ultra 7 processor 265H 6P+8E+2LPE/22T, 2.2GHZ, 8Xe/128EUs, 24MB L3, vPRO®, 28W BP Intel® Core™ Ultra 7 processor 255H 6P+8E+2LPE/22T, 2.0GHZ, 8Xe/128EUs, 24MB L3, 28W BP Intel® Core™ Ultra 5 processor 235H 4P+8E+2LPE/18T, 2.4GHZ, 8Xe/128EUs, 18MB L3, vPRO®, 28W BP Intel® Core™ Ultra 5 processor 225H 4P+8E+2LPE/18T, 1.7GHZ, 7Xe/112EUs, 18MB L3, 28W BP Intel® Core™ Ultra 7 processor 265U 2P+8E+2LPE/14T, 2.1GHZ, 4Xe/64EUs, 12MB L3, vPRO®, 15W BP Intel® Core™ Ultra 7 processor 255U 2P+8E+2LPE/14T, 2.0GHZ, 4Xe/64EUs, 12MB L3, 15W BP Intel® Core™ Ultra 5 processor 235U 2P+8E+2LPE/14T, 2.0GHZ, 4Xe/64EUs, 12MB L3, vPRO®, 15W BP Intel® Core™ Ultra 5 processor 225U 2P+8E+2LPE/14T, 1.5GHZ, 4Xe/64EUs, 12MB L3, 15W BP Intel® Core™ Ultra Processors Series 1: Intel® Core™ Ultra 7 processor 165H 6P+8E+2LPE/22T, 1.4GHZ, 8Xe/128EUs, 24MB L3, vPRO®, 28W BP Intel® Core™ Ultra 7 processor 155H 6P+8E+2LPE/22T, 1.4GHZ, 8Xe/128EUs, 24MB L3, 28W BP Intel® Core™ Ultra 5 processor 135H 4P+8E+2LPE/18T, 1.7GHZ, 8Xe/128EUs, 18MB L3, vPRO®, 28W BP Intel® Core™ Ultra 5 processor 125H 4P+8E+2LPE/18T, 1.2GHZ, 7Xe/112EUs, 18MB L3, 28W BP Intel® Core™ Ultra 7 processor 165U 2P+8E+2LPE/14T, 1.7GHZ, 4Xe/64EUs, 12MB L3, vPRO®, 15W BP Intel® Core™ Ultra 7 processor 155U 2P+8E+2LPE/14T, 1.7GHZ, 4Xe/64EUs, 12MB L3, 15W BP Intel® Core™ Ultra 5 processor 135U 2P+8E+2LPE/14T, 1.6GHZ, 4Xe/64EUs, 12MB L3, vPRO®, 15W BP Intel® Core™ Ultra 5 processor 125U 2P+8E+2LPE/14T, 1.3GHZ, 4Xe/64EUs, 12MB L3, 15W BP Note: P core base frequency at processor base power (BP) shown, other clock frequencies at different power levels supported
Chipset	Integrated into SoC
RAM	2x 262-pin SO-DIMM socket for up to 2x 48GB DDR5 SDRAM; DDR5-6400 Series 2 processors; DDR5-5600 Series 1 processors; dual channel operation; minimum capacity 1x 8GB single channel operation; inband ECC (IB-ECC) option (OS dependent)
Storage Interfaces	2x SATA channels (up to 6Gb/s), optional Optional on-board NVMe, 128GB, 256GB
USB	2x USB4 on COM-HPC USB[0:1]_SSTX/RX 2x USB 3.2 (Gen 1 & 2) on COM-HPC USB[2:3]_SSTX/RX 8x USB 2.0 on COM-HPC USB[0:7]
Serial Interfaces	2x high-speed serial ports
Bus Interfaces	PCI Express® Graphics (PEG) 1x8, PCIe Gen 4/5 on COM-HPC PCIe[16:23]¹ PCI Express® Gen 4, up to 2x4 on COM-HPC PCIe[8:15] PCI Express® Gen 4, up to 8 lanes, flexible bifurcation options on COM-HPC PCIe[0:7] ¹ Available on H-series processors
Display Controller	Intel® Arc™ Graphics, up to 8 Xe cores / 128 execution units (EU) H.264/AVC, H.265/HEVC, AV1, MJPEG encode/decode/transcode
Display Interfaces	Four independent display streams 2x USB4/USB-C ports (DP tunneling) 3x Digital Display Interface (DP 2.1, HDMI 2.1) 1x Embedded DisplayPort 1.4b
Network Interface	Two 10/100/1000Base-TX, 2.5G² based on Intel i226-LM ² Available bandwidths depending on carrier design
Audio Interface	High Definition Audio
Security Device	TPM 2.0

Miscellaneous	Watchdog Timer: Initiates system reset, programmable Fan Supply: 4-pin header for CPU fan, PWM speed controlled and PWM speed control for system fan supported RTC battery: external System Monitoring: voltage, temperature, CPU fan, system fan
Feature Highlights	COM-HPC Client
Firmware	UEFI Firmware: AMI Aptio® V Security: TPM 2.0 support, TCG compliant Power Management: ACPI Active fan control USB: USB legacy support (keyboard, mouse, storage) Monitoring: System Monitoring Health Monitoring Tria Adv. Boot Device Selection: Boot device priority setting based on physical interfaces
OS Support	Windows 11 IoT Enterprise LTSC BSP for Linux (Yocto)
Power Requirement	Voltage: +8V to +20V, +5V Stby optional, +3V RTC voltage Power Consumption: tbd W to tbd W (typ.)
Environment	Ambient Temperature: 0° ... 60°C (operating) -25° ... 85°C (storage) Humidity: 5 ... 95% (operating, non-condensing), 5 ... 95% (storage, non-condensing)
Dimensions	120 x 95

Technical Data for TRIA HCA-MLH

Order Reference

Order No.	Description	Reference	Status*
121611	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 7 255H 16C/22T, 2.0GHz, 28W BP; Graphics: Intel Arc 128 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4 2x SATA, 2x USB3, 8x USB2, PEG Gen 5 x8; PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-255H-NN0101C PCBFTX	OR
121613	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 5 225U 12C/14T, 1.5GHz, 15W BP; Graphics: Intel 64 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4 2x SATA, 2x USB3, 8x USB2, PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-225U-NN0101C PCBFTX	OR
121599	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 7 165H 16C/22T, vPro 1.4GHz, 28W BP; Graphics: Intel Arc 128 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4; 2x SATA, 2x USB3, 8x USB2, PEG Gen 5 x8; PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-165H-NN0101C PCBFTX	PV
121601	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 7 155H 16C/22T, 1.4GHz, 28W BP; Graphics: Intel Arc 128 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4; 2x SATA, 2x USB3, 8x USB2, PEG Gen 5 x8; PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-155H-NN0101C PCBFTX	PV
121603	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 5 135H 14C/18T, vPro 1.7GHz, 28W BP; Graphics: Intel Arc 128 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4 2x SATA, 2x USB3, 8x USB2, PEG Gen 5 x8; PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-135H-NN0101C PCBFTX	OR
121605	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 5 125H 14C/18T, 1.2GHz, 28W BP; Graphics: Intel Arc 112 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4 2x SATA, 2x USB3, 8x USB2, PEG Gen 5 x8; PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-125H-NN0101C PCBFTX	PV
121607	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 7 155U 12C/14T, 1.7GHz, 15W BP; Graphics: Intel 64 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4 2x SATA, 2x USB3, 8x USB2, PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-155U-NN0101C PCBFTX	PV

Order No.	Description	Reference	Status*
121609	COM-HPC Client Size A module (120mm x 95mm); CPU: Intel Core Ultra 5 125U 12C/14T, 1.3GHz, 15W BP; Graphics: Intel 64 EUs; 3x DP/HDMI; 1x eDP; Ethernet: 2x Intel i226-LM Gbit, TSN; HD audio; TPM 2.0; 2x USB4 2x SATA, 2x USB3, 8x USB2, PCIe Gen 4 3x4 + 1x1; 2x socket for DDR5; 0...+60°C.	MSC HCA-MLH-125U- NN0101C PCBFTX	PV

Ordering Information for TRIA HCA-MLH

*PV = Preferred variant; OR = on Request (in OEM quantities only)

Accessories

Carrier Options

Order No.	Description	Reference
114609	COM-HPC Client Carrier Board with 1x PEG x16, 1x PCIe x16, 3x PCIe x4 slots; 2x USB 4 Gen 2x2, 2x USB 3.2 Gen 2x1, 2x 1G/2.5G/10GBASE-T, 2x SATA; 3x DisplayPort, 1x eDP; audio module socket; 1x M.2 socket; 24pin ATX and ATX12V power connectors; Dimensions: 305mm x 244mm (ATX form factor);	MSC HC-MB-EV BRDFTX

Carrier Options for TRIA HCA-PLH/MLH/RLP/ALP

Cooling Options

Order No.	Description	Reference
114469	Passive Heatsink for HCA-MLH consisting of a singlepiece aluminum profile with fins, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC HCA-MLH-01 HSI-001
114471	Heatspreader for HCA-MLH. Single-piece aluminum profile, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC HCA-MLH-01 HSP-001
114482	Heatspreader / heat pipe for HCA-MLH. Singlepiece aluminum profile with embedded heat pipe, standoffs without thread (2.7mm inner diameter), screws and thermopad for the thermal contact to CPU, chipset, NVMe.	MSC HCA-MLH-01 HSP-HP-001
114470	Passive heatsink / heat pipe for HCA-MLH consisting of a single-piece aluminum profile with fins and embedded heatpipe, standoffs without thread (2.7mm inner diameter), screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC HCA-MLH-02 HSI-HP-001
114483	Heatspreader for HCA-MLH. Single-piece aluminum profile, standoffs with M2.5 thread, screws and thermopads for the thermal contact to CPU, chipset, NVMe.	MSC HCA-MLH-02 HSP-001

Cooling Options for TRIA HCA-MLH

Order No.	Description	Reference
79809	Fan kit for Heatsink MSC HCA-ALP/RLP/MLH/PLH-0x HSI-xxx, MSC C6B-TLH/ALP/RLP/MLH-0x HSI-xxx, MSC C6C-WLU/TLU/ALP/RLP/PLH-0x HSI-xxx, MSC C6C-EL/ALN/ASL-0x HSI-xxx, MSC C6C-RYZx-0x HSI-xxx, PWM fan 80x80x15mm.	MSC C6C-FANKIT-01-HSF-001

Fan Kit for COM-HPC Heatsinks

Memory Options

Order No.	Description	Reference
115233	8GB DDR5-5600 SO-DIMM, commercial temperature	MOD SODIMM DDR5 8GB PC5-44800 CL22 1B

Order No.	Description	Reference
115234	16GB DDR5-5600 SO-DIMM, commercial temperature	MOD SODIMM DDR5 16GB PC5-44800 CL22 1B
115235	32GB DDR5-5600 SO-DIMM, commercial temperature	MOD SODIMM DDR5 32GB PC5-44800 CL22 2B

Memory Options for TRIA HCA-RLP

Tria Technologies GmbH
Industriestr. 16
76297 Stutensee
info@tria-technologies.com
tria-technologies.com

Copyright © 2024 Tria Technologies GmbH. All data is for information purposes only and is subject to change without notice. No guarantee for legal purposes is implied. Information in this document has been carefully checked, however, no responsibility for inaccuracies has to be assumed. All brand or product names may be trademarks and property of their respective owners.