


TRIA Q7-AL

Intel® Atom™ E3900 / Pentium® / Celeron® SOC

70 x 70 mm

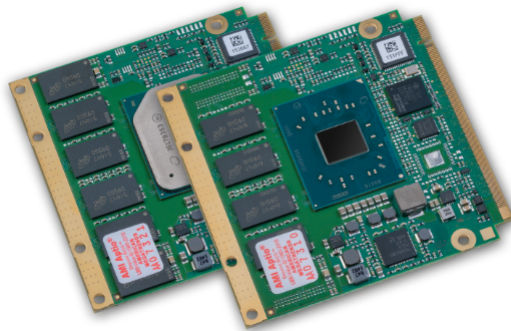

7 / 12 W

-40 +85

Q S E V E N



Highlights

- Intel Atom x7-E3950 quad-core 1.6/2.0GHz, 12W
- Intel Atom x5-E3940 quad-core 1.6/1.8GHz, 9.5W
- Intel Atom x5-E3930 dual-core 1.3/1.8GHz, 6.5W
- Intel Pentium N4200 quad-core 1.1/2.5GHz, 6W
- Intel Celeron N3350 dual-core 1.1/2.4GHz, 6W
- Integrated Intel Gen. 9 HD Graphics
- Up to 8GB DDR3L SDRAM, dual-channel, ECC support (optional)
- Up to 64GB eMMC Flash (optional)
- Two SATA-III interfaces (6Gbps)
- DisplayPort++ interface
- LVDS/Embedded DisplayPort interface
- Triple Independent Display support
- DirectX 12, OpenGL 4.3, OpenCL 2.0
- Up to 4x PCI Express x1 Gen. 2
- Up to 3x USB 3.0 Host interfaces
- Up to 8x USB 2.0 Host interfaces, 1x USB Host/Device support
- 1x Gigabit Ethernet
- UART, LPC, SPI, I2C, SMBus
- HD Audio, SDIO
- Trusted Platform Module (optional)

- Qseven Rev. 2.1 compliant

Technical Data

Technology	x86
Formfactor	Qseven
CPU	Intel Atom x7-E3950 Processor, quad-core, 1.6/2.0GHz, 18 EU GFX, 12W Intel Atom x5-E3940 Processor, quad-core, 1.6/1.8GHz, 12 EU GFX, 9.5W Intel Atom x5-E3930 Processor, dual-core, 1.3/1.8GHz, 12 EU GFX, 6.5W Intel Pentium Processor N4200, quad-core, 1.1/2.5GHz, 18 EU GFX, 6W Intel Celeron Processor N3350, dual-core, 1.1/2.4GHz, 12 EU GFX, 6W Intel® Technologies: Enhanced Intel® SpeedStep® Technology Intel® Virtualization Technology (VT-x) Intel® Virtualization Technology for Directed I/O (VT-d) Intel® Trusted Execution Engine (TXE) 3.0 Precision Time Management
Chipset	Integrated in SOC
RAM	Up to 8GB 1866 MT/s DDR3L SDRAM, dual-channel, soldered, ECC support (optional)
Flash	Up to 64GB eMMC V5.0 Flash, soldered (optional)
Storage Interfaces	2x SATA-III 6Gbps 1x SD 3.01
USB	3x USB 3.0, 3x USB 2.0, 1x USB 3.0/2.0 Host/Device* or 2x USB 3.0, 5x USB 2.0, 1x USB 2.0 Host/Device* or 1x USB 3.0, 7x USB 2.0, 1x USB 2.0 Host/Device* *One USB 3.0 port according to Qseven Rev. 2.1 (only SS signals)
Serial Interfaces	1x UART (no handshake)
Bus Interfaces	Up to 4x PCI-Express x1 Gen. 2 lanes 1x LPC Bus 1x I2C Bus 1x SPI Bus 1x SMBus
Display Controller	Integrated Intel HD Graphics Gen. 9 Up to 18 execution units (EU) 3D Acceleration: DirectX 12.0, OpenGL 4.3, OpenCL 2.0 Full Profile Video Decode: MPEG2, H.264 (L5.2), VC-1, WMV9, VP8, JPEG/MJPEG, H.265 (HEVC), VP9, MVC
Display Memory	UMA
Display Interfaces	Three independent displays supported 1x DisplayPort++ (DisplayPort 1.2a up to 4096 x 2160 @ 60Hz, HDMI 1.4b up to 3840 x 2160 @ 30Hz) Dual-Channel LVDS 24/18 bit up to 2560 x 1600 @ 60Hz or 2x Embedded DisplayPort 1.3 up to 4096 x 2160 @ 60Hz (optional)
Network Interface	10/100/1000Base-T (Intel i210)
Audio Interface	High Definition Audio
Security Device	Infineon Trusted Platform Module 2.0 (optional)
Miscellaneous	Watchdog Timer: Initiates system reset, (programmable, 1s ... 255h) Fan Supply: PWM Speed Control for system fan on carrier board RTC battery: external System Monitoring: Voltage, Temperature, CPU Fan, System Fan
Feature Highlights	Qseven Rev.2.1 compliant

Firmware	AMI Aptio UEFI
OS Support	Windows 10 BSP for Linux on request EAPI (HW Programming Interface)
Power Requirement	+5V +/-5% +5V Standby
Environment	Temperature Range: 0° ... 60°C (operating) -25° ... 85°C (storage) -40° ... 85°C (operating industrial) Humidity: 5 ... 95% (operating, non-condensing) 5 ... 95% (storage, non-condensing)
Dimensions	70 x 70 mm
Certificates	UL / CE
Cooling	Heatspreader Heatsink
Carrier	TRIA Q7-MB-EP5 TRIA Q7-MB-EP6

Technical Data for TRIA Q7-AL

Order Reference

Order No.	Description	Reference	Status*
78172	Qseven Rev.2.1 module with Intel Atom E3930 processor (1.3/1.8GHz), Dual-Core, 6.5W, 4GB 1866MT/s DDR3L, 32GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3930-25N0211I PCBFTX	PV
69791	Qseven Rev.2.1 module with Intel Atom E3930 processor (1.3/1.8GHz), Dual-Core, 6.5W, 2GB 1866MT/s DDR3L, 16GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics	MSC Q7-AL-E3930-14N0211C PCBFTX	PV
78435	Qseven Rev.2.1 module with Intel Atom E3930 processor (1.3/1.8GHz), Dual-Core, 6.5W, 2GB 1866MT/s DDR3L, no eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3930-1NN0211I PCBFTX	PV
69793	Qseven Rev.2.1 module with Intel Atom E3930 processor (1.3/1.8GHz), Dual-Core, 6.5W, 2GB 1866MT/s DDR3L, 16GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3930-14N0211I PCBFTX	PV
69799	Qseven Rev.2.1 module with Intel Atom E3940 processor (1.6/1.8GHz), Quad-Core, 9.5W, 4GB 1866MT/s DDR3L, 16GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics	MSC Q7-AL-E3940-24N0211C PCBFTX	PV
78438	Qseven Rev.2.1 module with Intel Atom E3940 processor (1.6/1.8GHz), Quad-Core, 9.5W, 4GB 1866MT/s DDR3L, no eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3940-2NN0211I PCBFTX	PV
69801	Qseven Rev.2.1 module with Intel Atom E3940 processor (1.6/1.8GHz), Quad-Core, 9.5W, 4GB 1866MT/s DDR3L, 16GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3940-24N0211I PCBFTX	PV
69795	Qseven Rev.2.1 module with Intel Atom E3950 processor (1.6/2.0GHz), Quad-Core, 12W, 8GB 1866MT/s DDR3L, 32GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics	MSC Q7-AL-E3950-35N0211C PCBFTX	PV
78442	Qseven Rev.2.1 module with Intel Atom E3950 processor (1.6/2.0GHz), Quad-Core, 12W, 8GB 1866MT/s DDR3L, no eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3950-3NN0211I PCBFTX	PV
78440	Qseven Rev.2.1 module with Intel Atom E3950 processor (1.6/2.0GHz), Quad-Core, 12W, 4GB 1866MT/s DDR3L, 16GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3950-24N0211I PCBFTX	PV
69797	Qseven Rev.2.1 module with Intel Atom E3950 processor (1.6/2.0GHz), Quad-Core, 12W, 8GB 1866MT/s DDR3L, 32GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3950-35N0211I PCBFTX	PV
69779	Qseven Rev.2.1 module with Intel Celeron N3350 processor (1.1/2.4GHz), Dual-Core, 6W, 4GB 1866MT/s DDR3L, 16GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics	MSC Q7-AL-N3350-24N0211C PCBFTX	OR
69777	Qseven Rev.2.1 module with Intel Pentium N4200 processor (1.1/2.5GHz), Quad-Core, 6W, 8GB 1866MT/s DDR3L, 32GB eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics	MSC Q7-AL-N4200-35N0211C PCBFTX	OR

Order No.	Description	Reference	Status*
78881	Qseven Rev.2.1 module with Intel Atom E3940 processor (1.6/1.8GHz), Quad-Core, 9.5W, 4GB 1866MT/s DDR3L ECC, no eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3940-2NN1211I PCBFTX	OR
78885	Qseven Rev.2.1 module with Intel Atom E3950 processor (1.6/2.0GHz), Quad-Core, 12W, 8GB 1866MT/s DDR3L, ECC, no eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3950-3NN1211I PCBFTX	OR
78883	Qseven Rev.2.1 module with Intel Atom E3950 processor (1.6/2.0GHz), Quad-Core, 12W, 4GB 1866MT/s DDR3L, ECC, no eMMC, GbE LAN, 2x USB 3.0 Host, 5x USB 2.0 Host, 1x USB2.0 Host/Device, TPM, DP, LVDS Graphics, industrial temperature -40...+85°C	MSC Q7-AL-E3950-2NN1211I PCBFTX	OR

Ordering Information for TRIA Q7-AL

*PV = Preferred variant; OR = on Request (in OEM quantities only)

Accessories

Carrier Options

Order No.	Description	Reference
67690	Qseven Rev. 2.0 compatible embedded platform (148 x 102mm), 10-28V input voltage, 1x RS232 on DB9 connector, 1x RS485 on pin header, 1x RS232 no handshake on pin header, dual RJ45 LAN connector with LED, 1x SATA, 1x mSATA slot, SD card holder, 1x USB 3.0 connector, 2x USB 2.0 connector, 1x USB 2.0 on pin row, 1x microUSB 2.0 OTG, CAN, I2C, LPC/ GPIO on pin header, I2C/SMBus, SPI, DisplayPort connector, LVDS/eDP on JLI30 connector, regulated backlight supply, mini PCI Express slot, HD Audio, CMOS battery. Commercial temperature range 0..+70°C	MSC Q7-MB-EP6-601 PCBFTX

Carrier Options for TRIA Q7-EL/AL/BT/BW

Cooling Options

Unable to render include or excerpt-include. Could not retrieve page.

Starter Kits

Unable to render include or excerpt-include. Could not retrieve page.

Tria Technologies GmbH
Industriestr. 16
76297 Stutensee
info@tria-technologies.com
tria-technologies.com

Copyright © 2024 Tria Technologies GmbH. All data is for information purposes only and is subject to change without notice. No guarantee for legal purposes is implied. Information in this document has been carefully checked, however, no responsibility for inaccuracies has to be assumed. All brand or product names may be trademarks and property of their respective owners.