


TRIA Q7-BW

Intel® Atom™ / Pentium® / Celeron® SOC N3000

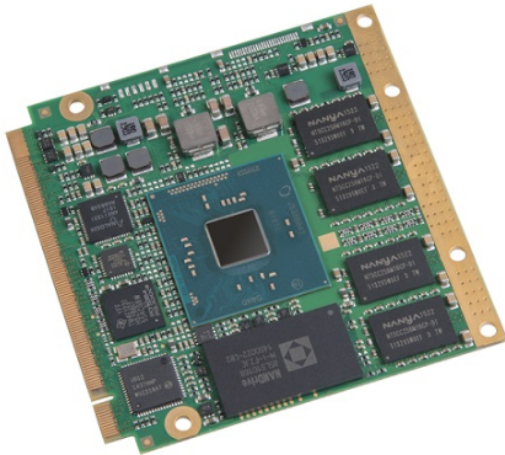

70 x 70 mm

6 / 9 W

0 +60

Q S E V E Z



Highlights

- Intel Pentium N3710 quad-core 1.6/2.56GHz, 6W
- Intel Celeron N3160 quad-core 1.6/2.24GHz, 6W
- Intel Celeron N3060 dual-core 1.6/2.48GHz, 6W
- Intel Celeron N3010 dual-core 1.04/2.24GHz, 4W
- Intel Atom x5-E8000 quad-core 1.04/2.0GHz, 5W
- Integrated Intel Gen. 8 HD Graphics
- Up to 8GB DDR3L SDRAM, dual-channel
- Up to 64GB eMMC Flash (optional)
- Up to 64GB SATA NAND Drive (optional)
- Up to 2x SATA-III interfaces (6Gbps)
- DisplayPort/HDMI/DVI interface
- LVDS/Embedded DisplayPort interface
- Triple Independent Display support
- DirectX 11.1, OpenGL 4.2, OpenCL 1.2
- Up to 3x PCI Express x1 Gen. 2
- Up to 2x USB 3.0 Host interfaces
- Up to 8x USB 2.0 Host interfaces, 1x USB Host/Device support*
- Gigabit Ethernet
- UART, LPC, I2C, SMBus, HD Audio, SDIO
- Qseven Rev. 2.0 compliant

Technical Data

Technology	x86
Formfactor	Qseven
CPU	Intel Pentium N3710 quad-core 1.6/2.56GHz, 2MB cache, 16 EU GFX, 6W Intel Celeron N3160 quad-core 1.6/2.24GHz, 2MB cache, 12 EU GFX, 6W Intel Celeron N3060 dual-core 1.6/2.48GHz, 2MB cache, 12 EU GFX, 6W Intel Celeron N3010 dual-core 1.04/2.24GHz, 2MB cache, 12 EU GFX, 4W Intel Atom x5-E8000 quad-core 1.04/2.0GHz, 2MB cache, 12 EU GFX, 5W Intel® Technologies: Enhanced Intel SpeedStep® Technology Intel® Virtualization Technology (VT-x) Intel® AES New Instructions, Secure Key
Chipset	Integrated in SOC
RAM	Up to 8GB 1600 MT/s DDR3L SDRAM, dual-channel, soldered
Flash	Up to 64GB eMMC Flash, soldered (optional) Up to 64GB SATA NAND Drive, soldered (optional)
Storage Interfaces	2x SATA-III 6Gbps (one port used for optional SATA NAND Drive) 1x SD 3.01
USB	4x USB 2.0 + 2x USB 3.0, one port supports USB 2.0/3.0 Host/Device* or 5x USB 2.0 + 1x USB 3.0, one port supports USB 2.0 Host/Device* or 6x USB 2.0 + 1x USB 3.0, one port supports USB 2.0 Host/Device* or 8x USB 2.0, one port supports USB 2.0 Host/Device* *USB Device only supported by Android
Serial Interfaces	1x UART (no handshake)
Bus Interfaces	Up to 3x PCI-Express x1 Gen. 2 lanes 1x LPC Bus 1x I2C Bus 1x SPI Bus* 1x SMBus *User/SIO SPI not supported; only external BIOS Flash
Display Controller	Integrated Intel HD graphics Gen. 8 Up to 16 execution units (EU) 3D Acceleration: DirectX 11.1, OpenGL 4.2, OpenCL 1.2 Video Decode: MPEG2, H.264 (L5.1), VC-1, WMV9, VP8, JPEG/MJPEG
Display Interfaces	Three independent displays supported 1x DisplayPort++ (DisplayPort 1.1a / HDMI 1.4b up to 3840 x 2160 @ 30Hz or 2560 x 1600 @ 60Hz) Dual-Channel LVDS 24/18 bit up to 1920 x 1200 @ 60Hz or 2x Embedded DisplayPort 1.4 up to 2560 x 1440 @ 60Hz (optional)
Network Interface	10/100/1000Base-T (Intel i210)
Audio Interface	High Definition Audio
Security Device	Infineon Trusted Platform Module 1.2 (optional)
Miscellaneous	Watchdog Timer: Initiates system reset, (programmable, 1s ... 255h) Fan Supply: PWM Speed Control for system fan on carrier board Real-Time Clock: Integrated in SOC, external battery System Monitoring: Voltage, Temperature, CPU Fan, System Fan
Feature Highlights	Qseven Rev.2.0 compliant

Firmware	AMI Aptio UEFI
OS Support	Windows 7 / 8 / 10 BSP for Linux on request EAPI (HW Programming Interface)
Power Requirement	+5V +/-5% +5V Standby
Environment	Temperature Range: 0° ... 60°C (operating commercial) -25° ... 85°C (storage) Humidity: 5 ... 95% (operating, non-condensing) 5 ... 95% (storage, non-condensing)
Dimensions	70 x 70 mm
Certificates	UL / CE
Cooling	Heatspreader Heatsink
Carrier	TRIA Q7-MB-EP5 TRIA Q7-MB-EP6

Technical Data for TRIA Q7-BW

Order Reference

Order No.	Description	Reference	Status*
69817	Qseven Rev.2.0 module with Intel Pentium N3710 processor (1.6/2.56GHz), Quad-Core, 6W, 4GB 1600MT/s DDR3L, 16GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-N3710-24N0211C PCBFTX	PV
69819	Qseven Rev.2.0 module with Intel Pentium N3710 processor (1.6/2.56GHz), Quad-Core, 6W, 4GB 1600MT/s DDR3L, 32GB eMMC Flash, 32GB SATA SSD, 1x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-N3710-2550211C PCBFTX	PV
69815	Qseven Rev.2.0 module with Intel Celeron N3160 processor (1.6/2.24GHz), Quad-Core, 6W, 4GB 1600MT/s DDR3L, 16GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-N3160-24N0211C PCBFTX	PV
72002	Qseven Rev.2.0 module with Intel Celeron N3160 processor (1.6/2.24GHz), Quad-Core, 6W, 8GB 1600MT/s DDR3L, 16GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-N3160-34N0211C PCBFTX	PV
69813	Qseven Rev.2.0 module with Intel Celeron N3060 processor (1.6/2.48GHz), Dual-Core, 6W, 2GB 1600MT/s DDR3L, 8GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-N3060-13N0211C PCBFTX	PV
69811	Qseven Rev.2.0 module with Intel Celeron N3010 processor (1.04/2.24GHz), Dual-Core, 4W, 2GB 1600MT/s DDR3L, 8GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-N3010-13N0211C PCBFTX	PV
69821	Qseven Rev.2.0 module with Intel Atom x5-E8000 processor (1.04/2.00GHz), Quad-Core, 5W, 2GB 1600MT/s DDR3L, 8GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 6x USB 2.0 Host, TPM, DP, LVDS Graphics	MSC Q7-BW-E8000-13N0211C PCBFTX	PV
69823	Qseven Rev.2.0 module with Intel Atom x5-E8000 processor (1.04/2.00GHz), Quad-Core, 5W, 2GB 1600MT/s DDR3L, 8GB eMMC Flash, 2x SATA-III, GbE LAN, USB 3.0 Host, 5x USB 2.0 Host, DP, LVDS Graphics	MSC Q7-BW-E8000-13N0220C PCBFTX	PV
71374	Qseven Rev.2.0 module with Intel Atom x5-E8000 processor (1.04/2.00GHz), Quad-Core, 5W, 2GB 1600MT/s DDR3L, 32GB eMMC Flash, 2x SATA-III, 3x PCIE x1, GbE LAN, 8x USB 2.0 Host, HSUART, HDA, DP, LVDS Graphics	MSC Q7-BW-E8000-15N0200C PCBFTX	PV

Ordering Information for TRIA Q7-BW

*PV = Preferred variant; OR = on Request (in OEM quantities only)

Accessories

Carrier Options

Order No.	Description	Reference
67690	Qseven Rev. 2.0 compatible embedded platform (148 x 102mm), 10-28V input voltage, 1x RS232 on DB9 connector, 1x RS485 on pin header, 1x RS232 no handshake on pin header, dual RJ45 LAN connector with LED, 1x SATA, 1x mSATA slot, SD card holder, 1x USB 3.0 connector, 2x USB 2.0 connector, 1x USB 2.0 on pin row, 1x microUSB 2.0 OTG, CAN, I2C, LPC/ GPIO on pin header, I2C/SMBus, SPI, DisplayPort connector, LVDS/eDP on JLI30 connector, regulated backlight supply, mini PCI Express slot, HD Audio, CMOS battery. Commercial temperature range 0..+70°C	MSC Q7-MB-EP6-601 PCBFTX

Carrier Options for TRIA Q7-EL/AL/BT/BW

Cooling Options

Order No.	Description	Reference
1114190	Passive Heatsink for Q7-BT, consisting of a single-piece aluminum profile with fins, through-hole distance bolts and through-holes in the heatrail part, with thermo pad for the thermal contact to the CPU. M3 mounting holes for an optional fan. Heatsink is also suitable for Q7-BW (all modules) and Q7-AL (only modules with Celeron/Pentium processor)	MSC Q7-BT-01 HSI-001
1114178	Heatspreader for Q7-BT with through-hole distance bolts, only offers a 70x65mm aluminium plane to mount a heatsink or thermally connect to a cooler. Heatspreader is also suitable for Q7-BW (all modules) and Q7-AL (only modules with Celeron/Pentium processor)	MSC Q7-BT-01 HSP-001
1137658	Passive Heatsink for Q7-BT, consisting of a single-piece aluminum profile with fins, threaded distance bolts and threaded holes in the heatrail part, and thermo pad for the thermal contact to the CPU. M3 mounting holes for an optional fan. Heatsink is also suitable for Q7-BW (all modules) and Q7-AL (only modules with Celeron/Pentium processor)	MSC Q7-BT-02 HSI-001
1129447	Heatspreader for Q7-BT with through-hole distance bolts and threaded holes in the heatrail part, offers a 70x65mm aluminium plane to mount a heatsink or thermally connect to a cooler. Heatspreader is also suitable for Q7-BW (all modules) and Q7-AL (only modules with Celeron/Pentium processor)	MSC Q7-BT-02 HSP-001
1137181	Heatspreader for Q7-BT with threaded distance bolts and through-holes in the heatrail part, offers a 70x65mm aluminium plane to mount a heatsink or thermally connect to a cooler. Heatspreader is also suitable for Q7-BW (all modules) and Q7-AL (only modules with Celeron/Pentium processor)	MSC Q7-BT-04 HSP-001
82584	Heatspreader for Q7-BT/BW with through-hole distance bolts and 4 through-holes in the heatrail part, all holes for countersunk screws, offers a 70x65mm aluminium plane to mount a heatsink or thermally connect to a cooler. Heatspreader is also suitable for Q7-AL (only modules with Celeron/Pentium processor).	MSC Q7-BT-07 HSP-001
1053769	Heat rail for Q7 baseboards. Recommended for conductive heat transfer from the Q7 module to the Q7 baseboard. Already assembled on all MSC baseboards.	MSC Q7-XXX-01 HTR-001

Cooling Options for TRIA Q7-BT/BW

Starter Kits

Order No.	Description	Reference
46995	Starterkit for TRIA Q7-BT/BW modules. Includes TRIA Q7-MB-EP6 Baseboard, Power Supply, Cable Kit and Heatsink. Please order the Q7-BT/BW module of your choice separately.	MSC Q7-SK-BT-EP6-KIT001

Starter Kits for TRIA Q7-BT/BW

Tria Technologies GmbH
Industriestr. 16
76297 Stutensee
info@tria-technologies.com
tria-technologies.com

Copyright © 2024 Tria Technologies GmbH. All data is for information purposes only and is subject to change without notice. No guarantee for legal purposes is implied. Information in this document has been carefully checked, however, no responsibility for inaccuracies has to be assumed. All brand or product names may be trademarks and property of their respective owners.